



- **Standard Analogue phone or SIP phone**
- **Robust housing, constructed of robust cold-rolled steel(CRS)**
- **Vandal resistant armored cord handset**
- **Wall mounting, simple installation**
- **Weather proof protection: up to IP65**
- **Programmable for auto-dial**
- **External power supply or PoE (SIP)**
- **RJ45 Port for SIP connection**
- **CE, FCC,RoSH compliance**

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.

#### **Standard Analogue**

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

#### **SIP-VoIP TECHNICAL SPECIFICATIONS**

##### **Power Input:**

12-24V DC

##### **Port:**

WAN: 10/100Base- T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base- T RJ-45 for PC, Auto MDIX

##### **Power Consumption:**

Idle:1.5W/ Active:1.8W

##### **Voice Features**

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- SIP support SIP domain, SIP authentication(none, basic,MD5),DNS name of server
- DTMF:SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

##### **Network Features**

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

## TECHNICAL SPECIFICATIONS

### Casing Material

Brushed robust cold-rolled steel(CRS)

Colors: RED, YELLOW, GREY

### Handset Material

ABS material handset with stainless steel spiral cord.

### Keypad optional

Hotline Phone without keypad

### Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

### Weather Resistance

IP65

### Ringtone

Shrill warble tone 80 dBA @ 1 metre typical

### Hook switch

Electronic / magnetic with no visible moving parts

### M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

### Weight

Up to 3 kg depending on option

## ANALOGUE

### Dialing

MF (tone)

### Power supply

Drawn from telephone line


### Lightning / Transients

Protection to ITU-T k.21 enhanced levels

### Programming

Can be programmed as an auto-dial phone

## DIMENSIONS

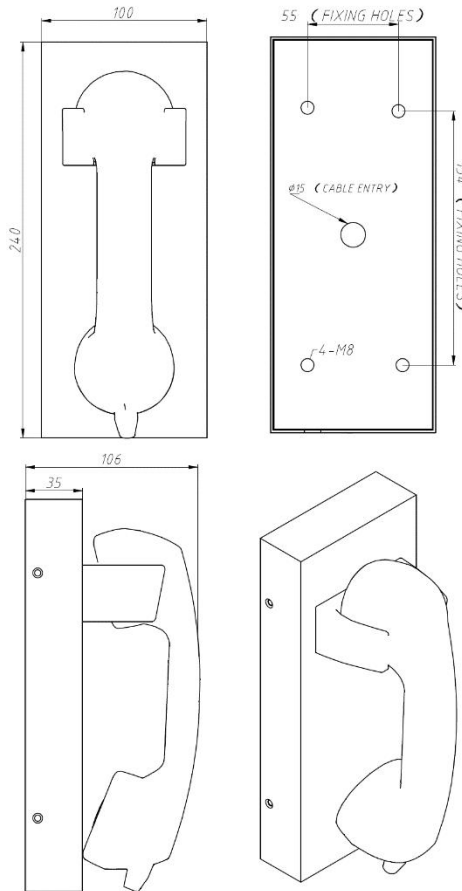

(Measured in mm)

## APPROVALS



This mark indicates compliance with the:  
Radio & Telecommunications Terminal Equipment  
Directive  
2004/108/EC



This mark indicates compliance with the:  
FCC Part 15 Subpart B Class B

## PACKAGE

unit size: 240 \*100 \*106(mm)

Carton size:340 \*235 \*165( mm )

Packaging materials: pearl cotton, carton

Gross weight: 3.5KG

Net weight: 2.7KG